

# RD35F.1.S系列 - 封闭两侧可打开

## Series of RD35F.1.S - Sealing type both side opening



闭合状态：  
Opening type:

- Q** 桥式  
Bridge type
- F** 全封闭式  
Enclosed
- BF** 半封闭式  
Semi-enclosed

注：无字母为普通型  
Note: blank means general type

打开方式：  
Opening way:




- B** 不可打开  
Non-opening
- S** 双侧打开  
Open of both side
- W** 外侧打开  
Exterior opening
- N** 内侧打开  
Interior opening
- F** 无需打开  
Without opening

款式：  
Style:

- Q.B** 桥式不可打开  
Bridge type non-opening
- Q.N** 桥式内侧开  
Bridge type interior opening
- Q.W** 桥式外侧开  
Bridge type exterior opening
- Q.S** 桥式双侧可打开  
Bridge type both side opening
- BF.B** 半封闭不可开  
Semi-enclosed non-opening
- BF.N** 半封闭内侧开  
Semi-enclosed interior opening
- BF.W** 半封闭外侧开  
Semi-enclosed exterior opening
- BF.S** 半封闭双侧开  
Semi-enclosed both side opening
- F.N** 封闭内侧开  
Enclosed interior opening
- F.W** 封闭外侧开  
Enclosed exterior opening
- F.S** 封闭双侧开  
Enclosed both side opening



接头类型：  
Bracket type:

- X** 斜型接头  
Oblique bracket
- F** 方型接头  
Square bracket

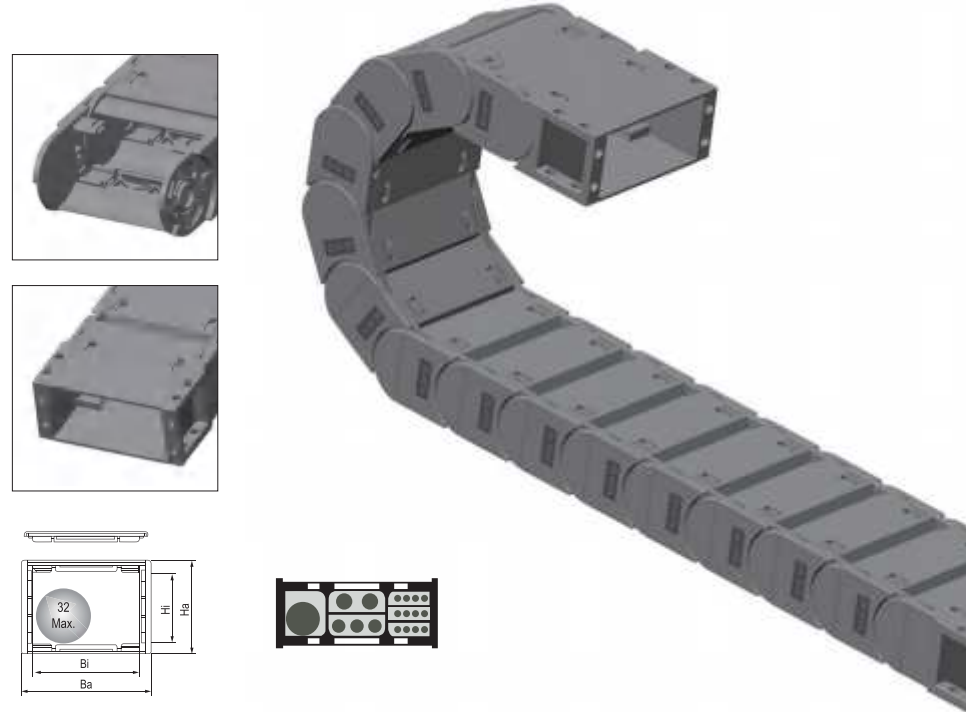

- ◎ The cable chain tested service life is up to 20 million times.
- ◎ The ledge of cable chain is able to open to inspect or replace cable.
- ◎ The cable chain can be mounted separator and cross separator to divide space and effectively protect cables. (See accessories table)
- ◎ The cable chain is suitable for a diameter of 32mm or less of cable.
- ◎ 测试使用寿命达 2 千万次
- ◎ 可将拖链内外侧封闭片打开，方便检查或更换线缆
- ◎ 可装竖隔片、横隔片区分空间，更有效保护线缆（见选配区）
- ◎ 适用于直径 32 毫米以下线缆

### 主要技术参数 Basic technical data

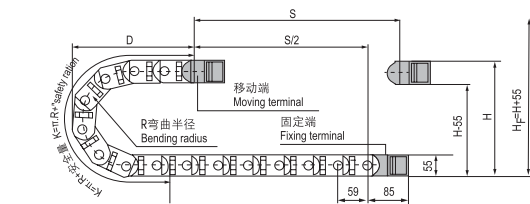

节距 = 59mm, 每米节数 = 17, 链长 = S/2 + K, S = 行程距离, K = π · R + "安全量"  
Pitch = 59mm, link per meter = 17, length of chain = S/2 + K, S = stroke, K = π · R + "safety ration"

R	75	100	125	150	200	250
H	205	255	305	355	455	555
D	162	187	212	237	287	337
K	354	472	531	590	767	944

安装实际高度:  $H_i = H + 55\text{mm}$  (负载 1.0kg/m)  
Actual mounting height:  $H_i = H + 55\text{mm}$  (load 1.0kg/m)


### RD35F.1.S 系列 - 封闭两侧可打开 Series of RD35F.1.S - Sealing type both side opening



系列号 Series No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters							代号 No.	
							可配接头类型 Applicable bracket type	孔径 Bore diameter $\phi 1$	孔距 (mm) hole distance						
		A	B	C	D	E	F								
RD35F.1.50S	35	50	55	70	F.S	75,100, 125,150, 200,250	F-F	7.2	24	64	85	26	15	76	RD35F.1.50S-FJT
RD35F.1.75S	35	75	55	95	F.S		F-F	7.2	24	89	85	26	15	101	RD35F.1.75S-FJT
RD35F.1.100S	35	100	55	120	F.S		F-F	7.2	24	114	85	26	15	126	RD35F.1.100S-FJT
RD35F.1.125S	35	125	55	145	F.S		F-F	7.2	24	139	85	26	15	151	RD35F.1.125S-FJT
RD35F.1.150S	35	150	55	170	F.S		F-F	7.2	24	164	85	26	15	176	RD35F.1.150S-FJT

注：S 表示两侧可打开，F 表示全封闭  
Note: S indicates that the both side open, F indicates that the sealing

### 固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

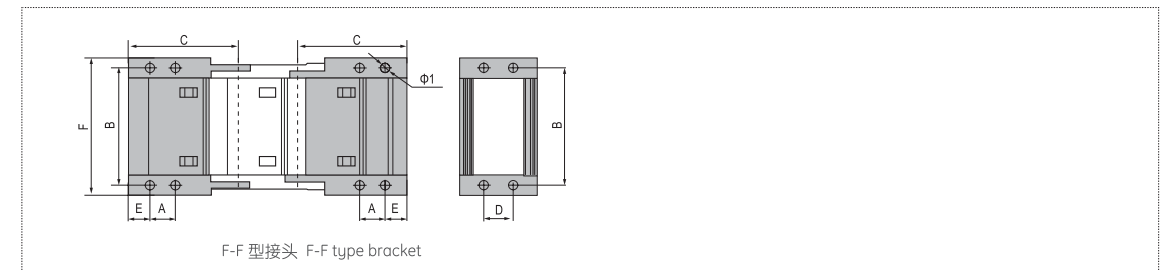

### 订货示例 Order Sample

示例 拖链内高 35mm、内宽 50mm、半径 75mm、长度 1 米 / 17 节 (Sample: inner height 35mm, inner width 50mm, radius 75mm, length 1 meter / 17 links)

拖链 Chain RD35F.1.50S R75 1000mm / 17 Links

接头 Bracket RD35F.1.50S-XJT 翻 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim / 1 horizontal shim can be mounted in every link)

注：可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.